



# DFC150-36 X2 Full Range 60 inch Centre Channel / Multi Purpose Loudspeaker

Cabinet colour

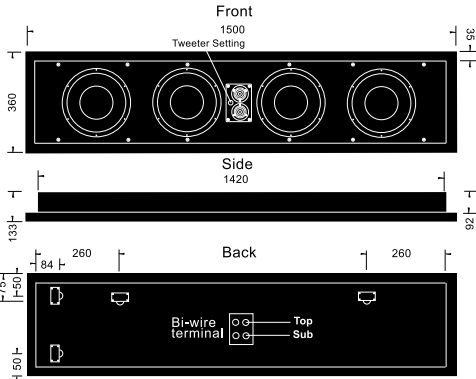

Screen options



DFC150-36 X2 Loudspeaker  
Note: All dimensions are in mm.  
Artcoustic can not be held  
responsible for any wrong or  
missing dimensions.

## The DFC150-36 X2 Centre Channel / Multi Purpose Loudspeaker

This multi purpose monitor is a scaled down version of the Artcoustic flagship model DFF180-43 X2. The DFC150-36 has been designed to match all modern 60 inch flat screen monitors and can be mounted horizontally or vertically. The The DFC150-36 X2 incorporates four 10" X2 long-throw woofers, taking the bass response down to an incredible 15Hz. At the other end of the frequency spectrum, response extends to 40kHz at 96dB (1w +/-2dB), thanks to the twin X2 rippled dome tweeters.

The DFC150-36 X2 is ideal for use in high-end installations, where sound quality is paramount, such as mid-field to full-space studio monitoring, for medium to large sized home cinema installations, and for commercial use in bars, restaurants and corporate presentation facilities, including commercial movie theatres. The DFC150-36 is bi-wirable, enabling you to control the woofers and tweeters independently.

Each DFC150-36 X2 comes with two PA-300 300watt amplifiers.

## DFC150-36 X2 50 inch centre channel

2.5-way Full Range Studio Monitor. 4 x 10 inch LF and MF unit, 2 x 1.5 inch 90 degree X2 HF unit. All screen options are available for the DFC150-36: The Match System / Digital Prints.

Operating Range:	15 Hz to 40 KHz
Beamwidth:	HF, 90 degree X2
FR:	SPL 1 Watt 95dB Max SPL 114 dB SPL avg 4 ohm continuous power handling 220 W
LF:	Max SPL 116 dB SPL avg 8 ohm continuous power handling 220 W
HF:	Max SPL Switch setting (0) 114 dB, setting (1) 116 dB avg 4 ohm continuous power handling 100 W
Connections:	Gold plated screw terminals, bi-amp
Dimensions:	1500 H x 360 W x 133 D mm
Weight:	50 kg each

## Applications

2-channel stereo / mid field / fullspace studio monitoring max SPL 1m 116dB max SPL 4m 108 dB	Suitable
Home Cinema, medium - large room, screening room max SPL 1m 116dB max SPL 4m 108dB	Suitable
Restaurant - Bar - fixed installation - boardroom, auditorium max SPL 1m 116dB max SPL 4m 108dB	Suitable



Bridged input MF/HF

Bridged output 300 watt  
MF/HF



Bridged input Sub

Bridged 300 watt  
output Subwoofer



Artcoustic PA-300 Amplifier